



RACETORATIONS



Lam-Art
Exhibition & Display

01427 616565.

Lift should be within 5thou.
measure 475 @ lobe.

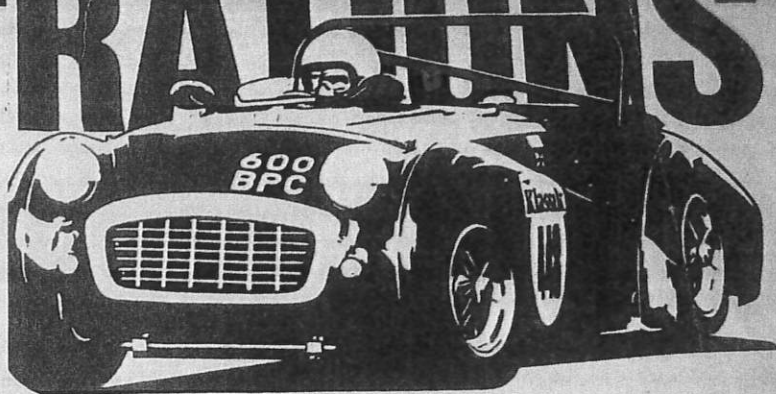

For all your exhibition and display requirements...

Tel: 01305 260851 • lamart.co.uk

RACETORATIONS CAMSHAFT SPECIFICATION SHEET

TYPE OF CAM	TIMING	LIFT	TAPPETS	DURATION	INSTALLATION FIGURES
555	46 86 86 46	376	.022	312'	106
666	50 70 75 45	313	.015	300'	100
777	30 70 70 30	327	.024	280'	107
888	60 80 85 55	313	.014	320'	100
999	42 78 78 42	353	.025	300'	107

COAT THE CAMSHAFT JOURNALS AND ALL LOBES WITH CAM LUBE OR SIMILAR BEFORE INSTALLATION.

INSTALLATION IS CRANKSHAFT DEGREES AFTER TOP DEAD CENTRE WITH NUMBER ONE INLET VALVE AT FULL LIFT.

TAPPETS INLET AND EXHAUST COLD.

TIMING FIGURES ARE NOT USUALLY 100% ACCURATE. OPENING FIGURES SHOULD BE APPROXIMATELY CORRECT. BUT CLOSING FIGURES MAY BE UP TO 10% OUT.

FIGURES APPLY TO 4 CYLINDER AND 6 CYLINDER ENGINES.

LIFT FIGURES ARE AT THE CAMSHAFT LOBE.

THE RACETORATIONS CATALOGUE SPEED SUPPLEMENT DESCRIBES THE DRIVING CHARACTERISTICS OF EACH CAM.

ANY QUERIES REGARDING THE INSTALLATION, SPECIFICATION OR PERFORMANCE OF ANY OF THE CAMS SHOULD ONLY BE REFERRED TO RACETORATIONS. 0427 616565.